



L  
U  
X  
E  
M  
B  
O  
U  
R  
G

# ProtecU™ PURE By Prodec

Comfortable, super soft flexible powder-free nitrile gloves, made at the highest quality factory in Malaysia to provide the best protection.



Made in Malaysia



US-FDA 510K, ISO 9001, ISO 13485



EN-455, ASTM D6319



# ProtecU™ PURE

By Prodec

Disposable Nitrile Non-Sterile Examination Gloves

## FEATURES

- Latex-free, powder-free, non-sterile disposable nitrile exam gloves.
- Durable and puncture resistant
- Hypoallergenic
- Highly elastic and super soft
- Easy donning with extra strength with a rolled rim
- A natural rubber-like feel
- Textured in finger tips for enhanced grip in all situations including touchscreen use
- Suitable for food contact, including high fat, oils, etc
- AQL 1.5



## QUALITY STANDARDS

- Complies with EN 455
- Complies with ASTM D6319

## TECHNICAL INFORMATION

Type	Powder-free, non-sterile
Material	Nitrile (Acrylonitrile-butadiene)
Colour	Blue
Model	Ambidextrous, standard length - beaded cuff
Size/overall length as per EN 455-2	S, M, L and XL 240 mm (≥230mm for USA)
Impermeability as per EN 455-1	AQL 1.5
Durability, in original package	5 years




# ProtecU™ PURE

By Prodec

Disposable Nitrile Non-Sterile Examination Gloves

Length (mm)	≥ 240	
<b>Thickness Measurements (mm)</b>		
Palm (center of Palm)	0.09 ± 0.02	
Finger (13mm ± 3mm from tip)	0.11 ± 0.02	
<b>Properties</b>	<b>Before Ageing</b>	<b>After Ageing</b>
Tensile Strength (MPa)	≥ 15	≥ 14
Elongation (%)	≥ 500	≥ 400
Force at Break (N)	≥ 6	≥ 6
	<b>Inspection Level</b>	<b>AQL</b>
Freedom From Holes	G1	1.5
Physical Dimensions	S2	4.0
Tensile Strength	S2	4.0
Powder Content	≤ 2mg/Dm2	Max
Protein Content	ASTM=N=3	≥ 200ug/dm2 Max

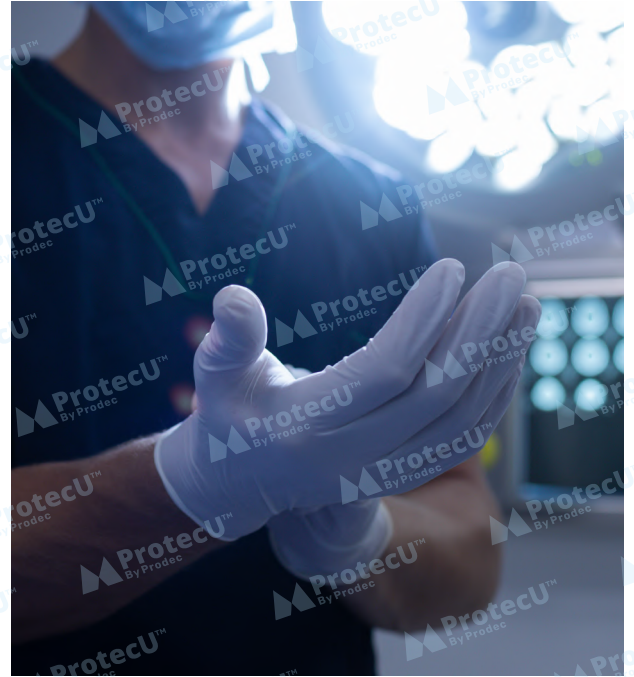

SIZE	Width(mm)	Minimum Length(mm)	Weight(gr)
S	80±10	240Min	3.0±0.3
M	95±10	240Min	3.5±0.3
L	110±10	240Min	4.0±0.3
XL	≥110	240Min	4.5±0.3

## FEATURES

- Fingertip textured
- Powder free
- 100% latex free
- Ambidextrous
- Standard cuff
- Blue color

## PACKAGING

100 gloves per box  
10 boxes per carton

## STANDARDS

ASTM D6319  
ASTM D6124  
ASTM D5712  
EN 455 part 1 - 3  
FDA 510K

## MANUFACTURING ACCREDITATIONS

ISO 9001, ISO 13485